

HD 14i VV

Tandem roller with two vibrating roller drums


Tandem rollers Series HD CompactLine / Series H265



HIGHLIGHTS HD CompactLine

- > Simple, intuitive and language-neutral control
- > Simple transport, simple loading
- > Ergonomic driver platform
- > Excellent view of drum edge, machine and construction site environment
- > Compact dimensions

Machine dimensions		
Total length (L)	mm • in	2896 • 114.0
Width (B)	mm • in	1506 • 59.3
Total height (H)	mm • in	2590 • 102.0
Drum width (X)	mm • in	1380/1380 • 54.3/54.3
Height, loading, min. (HI)	mm • in	1820 • 71.7

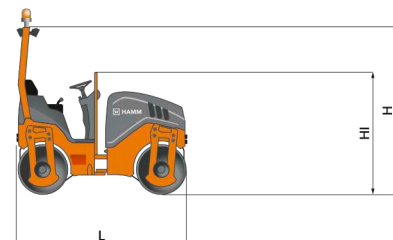

EU Stage V /
EPA Tier 4

TECHNICAL DATA		Unit	HD 14i VV
	Weights		
Operating weight with ROPS	kg • lbs		4435 • 9,779
Operating weight, max.	kg • lbs		5630 • 12,414
Static linear load, front/rear	kg/cm • lbs/in		16,3/15,8 • 91.3/88.5
French classific., data/class			10,6/VT0
	Machine dimensions		
Total length	mm • in		2896 • 114.0
Total height with cab	mm • in		2720 • 107.1
Total height with ROPS	mm • in		2590 • 102.0
Height, loading, min.	mm • in		1820 • 71.7
Wheelbase	mm • in		1950 • 76.8
Total width	mm • in		1506 • 59.3
Max. working width	mm • in		1430 • 56.3
Curb clearance, left/right	mm • in		720/720 • 28.3/28.3
Turning radius, inside	mm • in		2650 • 104.3
	Drum dimensions		
Drum width, front/rear	mm • in		1380/1380 • 54.3/54.3
Drum diameter, front/rear	mm • in		898/898 • 35.4/35.4
Drum thickness, front/rear	mm • in		16/16 • 0.6/0.6
Drum type, front			Smooth/non-split
Drum type, rear			Smooth/non-split
Track offset, left/right	mm • in		0/50 • 0.0/2.0
	Diesel engine		
Manufacturer			KUBOTA
Type			V2403-CR
Number of cylinders			4
Power rat. ISO 14396, kW/PS/rpm			37.4/50,9/2700
Power rating SAE J1995, kW/HP/rpm			37,4/50,1/2700
Emission standard			EU Stage V / EPA Tier 4
Exhaust gas after-treatment			DOC-DPF
	Drive		
Speed, infinitely variable	km/h • mph		0 - 11,0 • 0.0 - 6.8
Climbing ability, vibration on/off	%		30/40
	Vibration		
Vibration frequency, front, I/II	Hz • vpm		60/51 • 3,600/3,060
Vibration frequency, rear, I/II	Hz • vpm		60/51 • 3,600/3,060
Amplitude, front, I/II	mm • in		0,51/0,31 • .020/.012
Amplitude, rear, I/II	mm • in		0,51/0,31 • .020/.012
Centrifugal force, front, I/II	kN • lbs		64/39 • 14,400/8,775
Centrifugal force, rear, I/II	kN • lbs		64/39 • 14,400/8,775
	Steering		
Oscillation angle +/-	°		8
Steering, type			Articulated steering
	Sprinkler system		
Water sprinkler, type			Pressure
	Tank capacity/Fill capacity		
Fuel tank, capacity	L • Gal		73 • 19.3
Water tank, capacity	L • Gal		260 • 68.7
	Sound level		
Acoustic power LW(A), sticker			106
Acoustic power LW(A), measured			102

EQUIPMENT

12 V outlet, 3-point articulation, Dashboard with displays, indicator lights and switches, Dashboard cover, lockable and weather-resistant, Pressure water sprinkling with interval switch, Operator's platform with entry from both sides, Left and right drive lever, Mechanical battery isolation switch, Track offset, mechanical, Automatic vibration system, Water filtering (triple), Central water drain

OPTIONAL EQUIPMENT

Plastic scraper, foldable, ROPS cabin with heating, ROPS, foldable, Safety belt monitoring device, Radio, Protective roof, Edge pressing and cutting equipment, Chip spreader, Thermal aprons, All-wheel lock, HAMM Compaction Meter (HCM), Automatic engine-off function, HAMM Temperature Meter (HTM), Back-up alarm, Telematics system, interface, Working light, Rotating beacon, Drum edge lighting, Water drain valve, Tow eye, front, Tow hitch

WIRTGEN AMERICA

6030 Dana Way
 Antioch, TN 37013
 Phone +1 615-501-0600
 Fax +1 615-501-0691
 info.america@wirtgen-group.com
 www.wirtgen-group.com/america

HAMM AG

Hammstraße 1
 D-95643 Tirschenreuth
 Tel +49 9631 80-0
 Fax +49 9631 80-111
 www.hamm.eu

